



SP TOURING R1




A tire that offers better performance, improved durability, and a sporty 4-rib design. It is highly suitable for small and medium-sized cars.

Key Technologies


Better Durability

Tires with a 4-rib tread design have higher tread stiffness compared to 5-rib treads on small-sized tires, resulting in **better dry road performance**. Suitable for small and medium-sized cars.

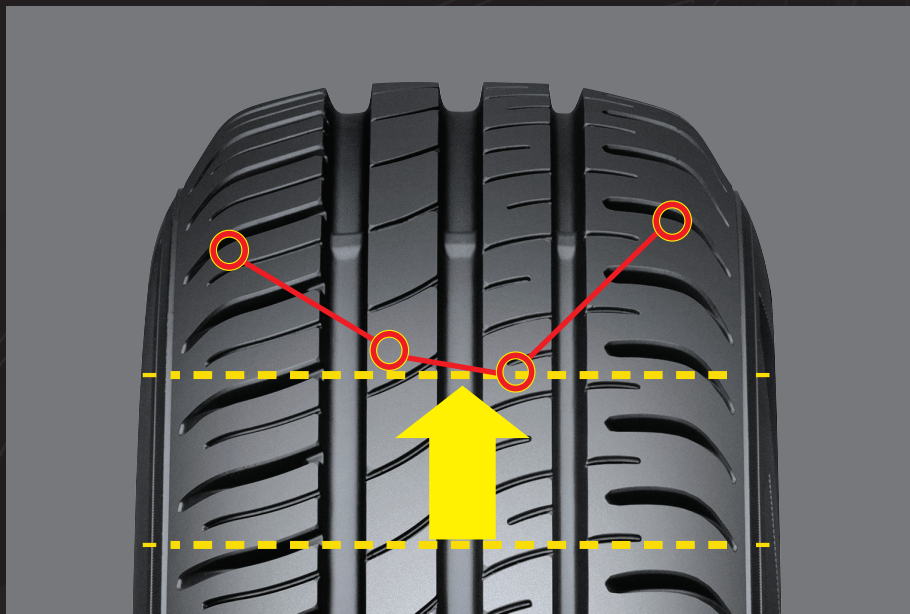

Wear Resistance

When cornering, the tire shoulder contact area expands, which helps to disperse the ground pressure and thus reduces tire wear.

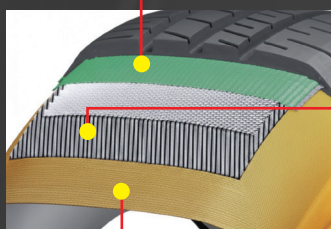

Jointless Nylon Full Band

Maintains the steel belt position under all conditions.


Wider Reinforced Steel Belt

A wider steel belt provides more even tread contact.

High Tension Casing Ply


A higher tension ply prevents the tire sidewall from deforming easily.

SP
TOURING T1

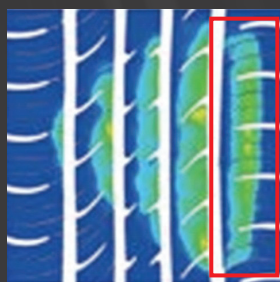

The shoulder part of the tire does not contact perfectly.

SP
TOURING R1

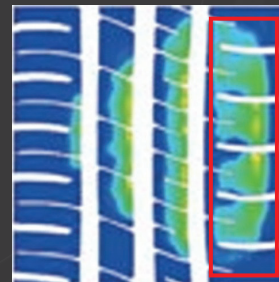

The shoulder part of the tire contacts perfectly, resulting in better shape and contact pressure.

SP TOURING R1

Sporty Design

SP Touring R1 has 4 ribs and 3 wide tread grooves, making it look sportier compared to the previous tire.

SP
TOURING T1



WIDER
SHOULDER RIB



WIDER
GROOVE

SP
TOURING R1




Wear Appearance

The sporty design still looks good even when usage has reached 80%.



Hydroplaning Simulation

The SP Touring R1 tread design is capable of expelling water perfectly.

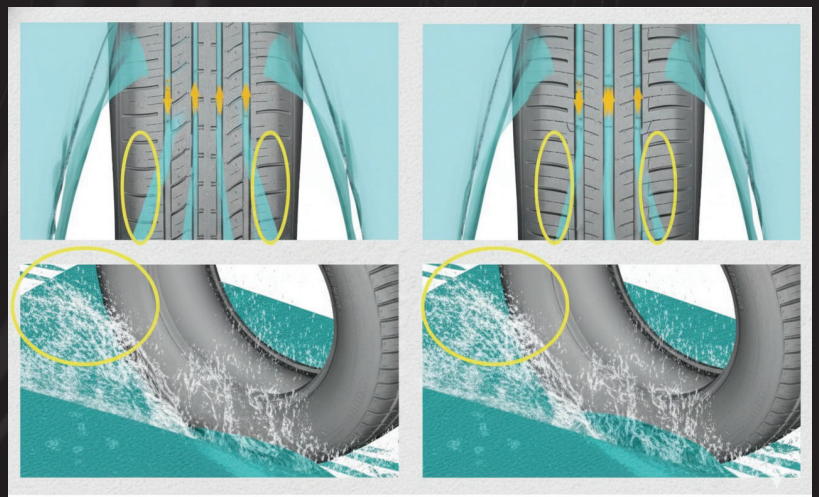

Size Lineup



Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF
16	50	195/50R16	84	H	
	55	185/55R16	83	H	
		205/55R16	91	H	
		215/55R16	93	H	
	60	185/60R16	86	T	
		205/60R16	92	H	
15		215/60R16	95	H	
	50	175/50R15	75	H	
	55	185/55R15	82	H	
		195/55R15	85	H	
	60	175/60R15	81	S	
		185/60R15	84	H	
		195/60R15	88	H	
		205/60R15	91	T	
	65	175/65R15	84	H	
		175/65R15	84	T	
		185/65R15	88	H	
		195/65R15	91	H	
		205/65R15	94	H	
		205/65R15	94	T	
		215/65R15	96	H	

Rim (inch)	Aspect ratio (%)	Tire Size	Load Index	Speed Symbol	XL or RF
15	70	205/70R15	96	H	
		215/70R15	98	H	
14	60	165/60R14	75	T	
		185/60R14	82	H	
		195/60R14	86	H	
	65	165/65R14	79	T	
		175/65R14	82	H	
		175/65R14	82	T	
13		185/65R14	86	H	
		185/65R14	86	T	
		195/65R14	89	T	
	70	165/70R14	81	H	
		175/70R14	88	T	
		185/70R14	88	H	
		185/70R14	88	T	
		195/70R14	91	H	
	80	185/80R14	91	S	
	65	165/65R13	77	T	
	70	165/70R13	79	T	
		175/70R13	82	T	
		185/70R13	86	S	
		185/70R13	86	T	
12	80	165/80R13	83	S	
	70	155/70R12	73	T	
		175/70R12	80	S	



TOYOTSU BINTER
Toyota Tsusho Group Company

Distributed by:

Toyotsu Binter Malaysia Sdn Bhd
Unit 902C, Level 9, Tower C, Uptown 5,
5, Jalan SS21/39, Damansara Utama, 47400 Petaling Jaya, Selangor
Phone: +603 7733 9939